



Motorola Moto X Force Teardown

Wanna know how to disassemble Motorola Moto X Force? Here show detailed steps.

Written By: Eric



INTRODUCTION

Wanna know how to disassemble Motorola Moto X Force? Here show detailed steps.

TOOLS:

- [Metal opening](#) (1)
 - [Tweezers](#) (1)
 - [T3 Torx Screwdriver](#) (1)
 - [Spudger](#) (1)
 - [Heat Gun](#) (1)
-

Step 1 — Remove SIM card tray.



⚠ Remove it or it will be a barrier to remove motherboard.

Step 2 — Remove back cover.



- Use heat gun to heat up back cover firstly.
- Insert metal opening tool to open a gap and cut adhesives around.

Step 3 — Remove metal logo cover.



- Use tweezers to cut adhesives underneath.

Step 4 — Remove middle frame.



- Twist off 17 screws by T3 Torx screwdriver.
- Take away rubber bracket securing NFC antenna and release NFC antenna connector.

Step 5





- Take away rubber bracket securing MIC flex and release microphone flex cable connector.

Step 6 — Remove side button.



- After middle frame's separating from the rest of parts, side buttons are loose and easy to remove.

Step 7 — Remove microphone flex cable ribbon.

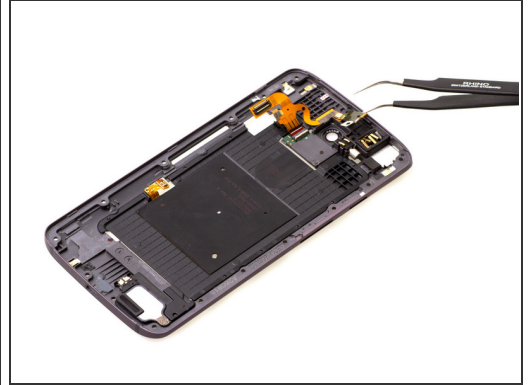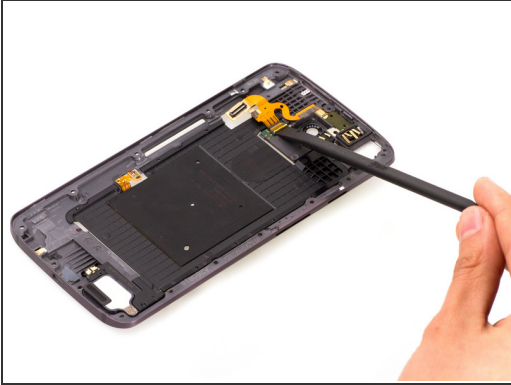



- Release MIC connector.
- There are adhesives existed underneath.

Step 8 — Remove headphone jack.



- Use tweezers to pry this part up.

Step 9 — Remove vibration motor.

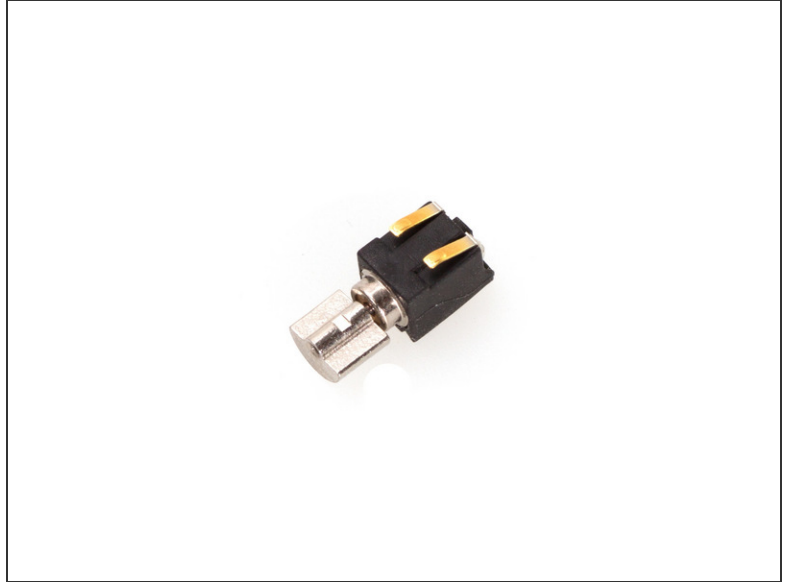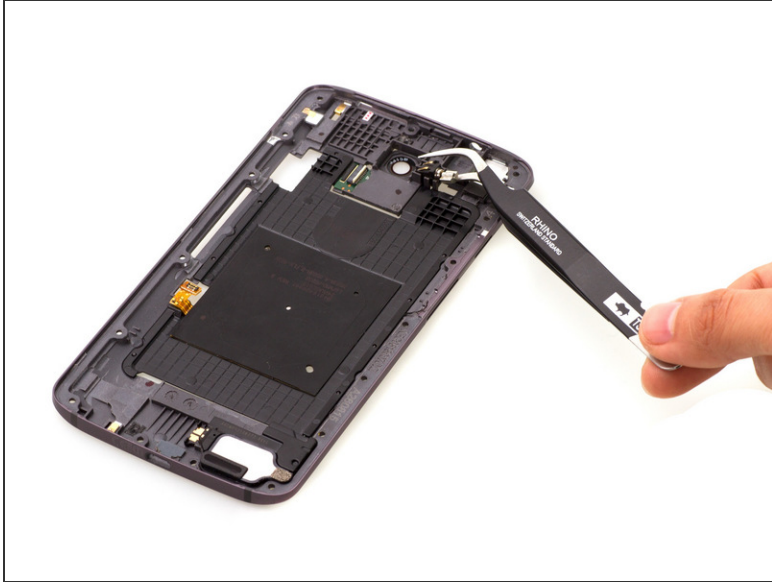

- The vibrator is only fastened by the plastic bracket.

Step 10 — Remove NFC antenna along with plastic board attached.





- There are a little bit adhesives around, but you can peel this part easily.

Step 11 — Remove loudspeaker.




- Pry this part up.

Step 12 — Remove metal bracket securing on motherboard.

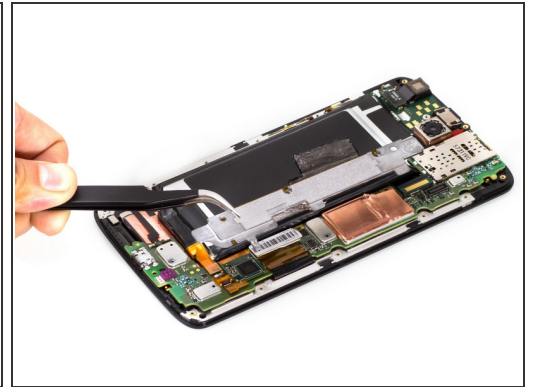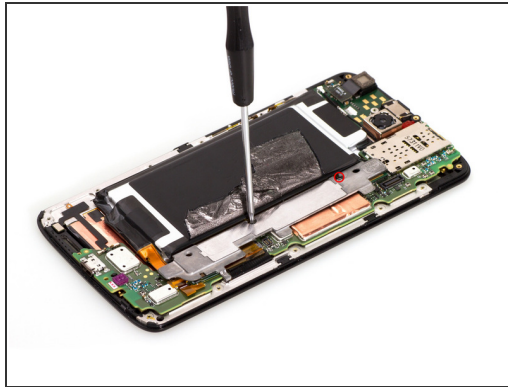


- Peel off the tape.
- Twist off 2 screws.

Step 13 — Release battery connector and side button connector.

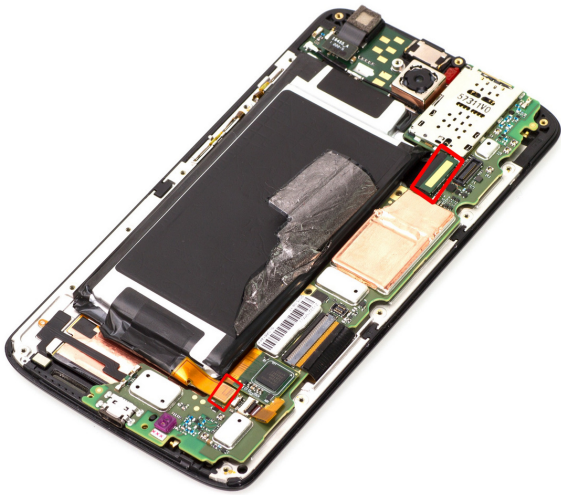

- Release this two connectors carefully.

Step 14 — Release touch digitizer connector.

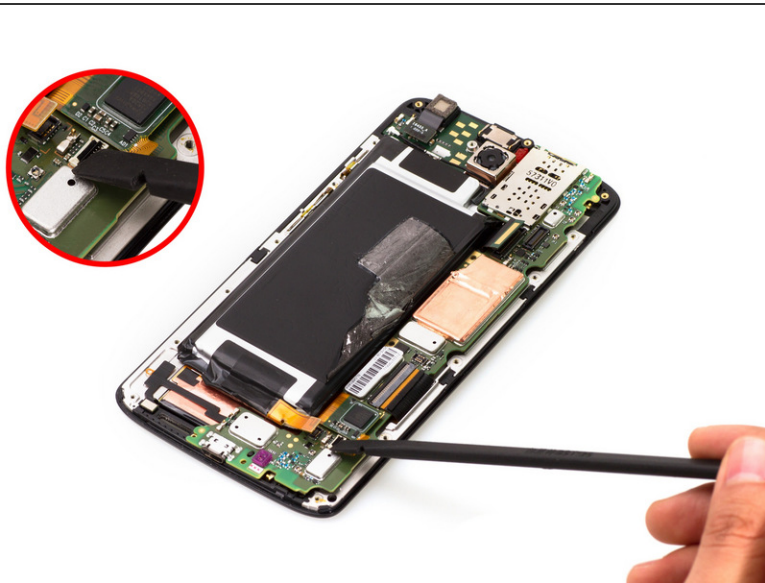



- The LCD assembly has two connectors, here is touchscreen connector.

Step 15 — Release LCD display connector.





- This one is display connector.

Step 16 — Release motherboard assembly.

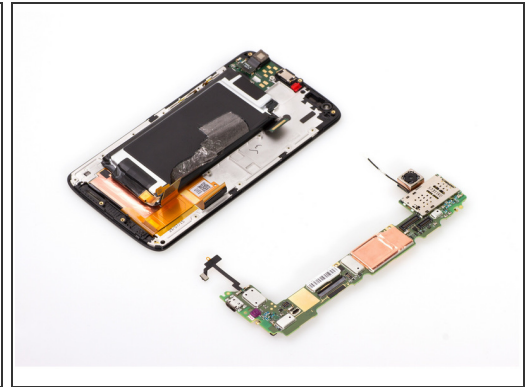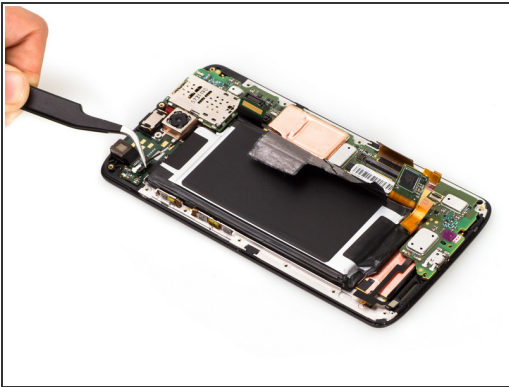


- Release signal cable connector.
- Pry the motherboard assembly up.

Step 17 — Remove rear camera.

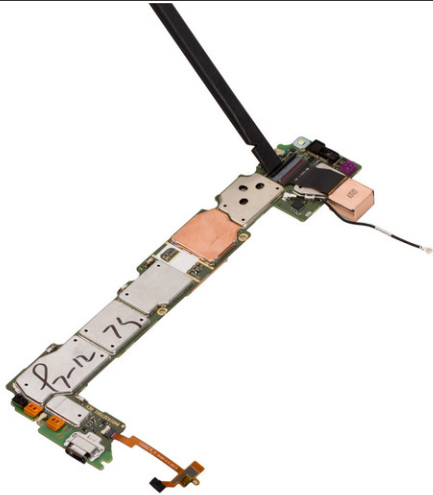


- Moto X Force packs a 21-megapixel primary camera on the rear.

Step 18 — Release signal cable connector and remove it.

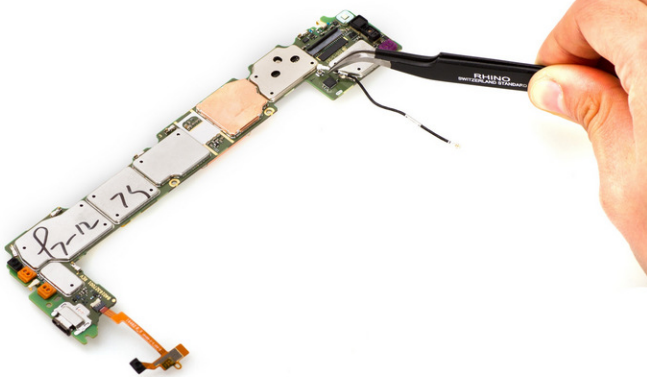


- Use tweezers to release the connector.

Step 19 — Remove proximity sensor flex.

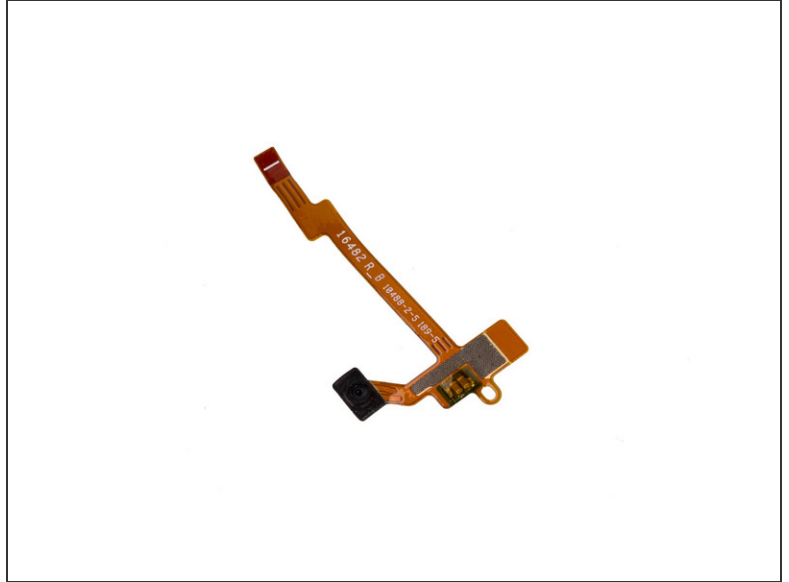


- With this sensor flex, you can wave your hand on the top of the screen to wake up the screen.

Step 20 — Pry up and remove battery.

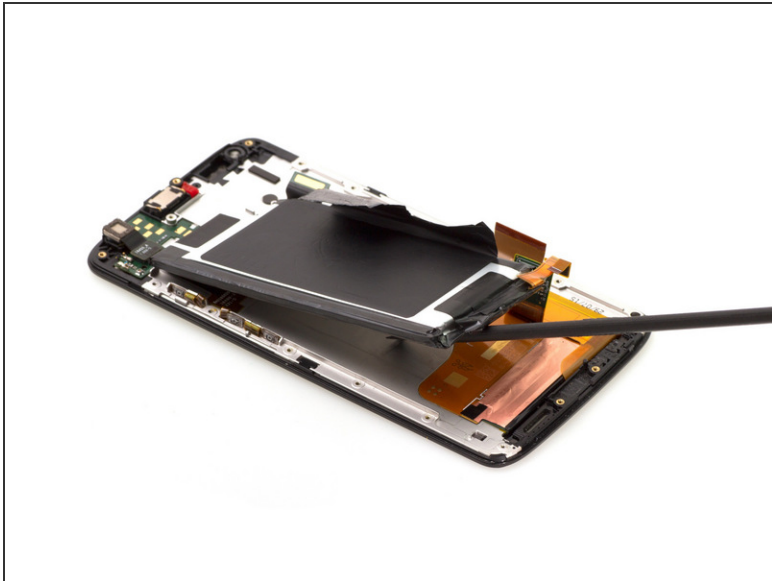


- Non-removable Li-Ion 3760 mAh battery.

Step 21 — Remove front-facing camera.

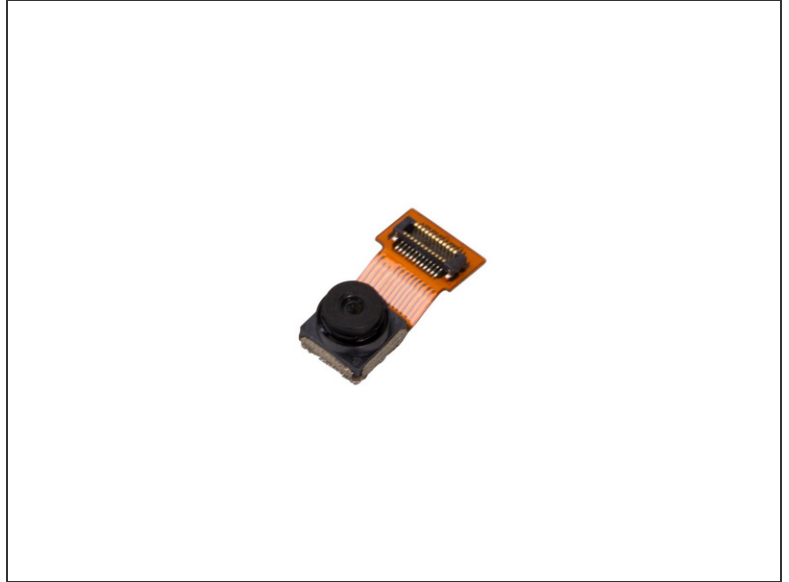

- A 5-megapixel front shooter for selfies.

Step 22 — Remove earpiece.

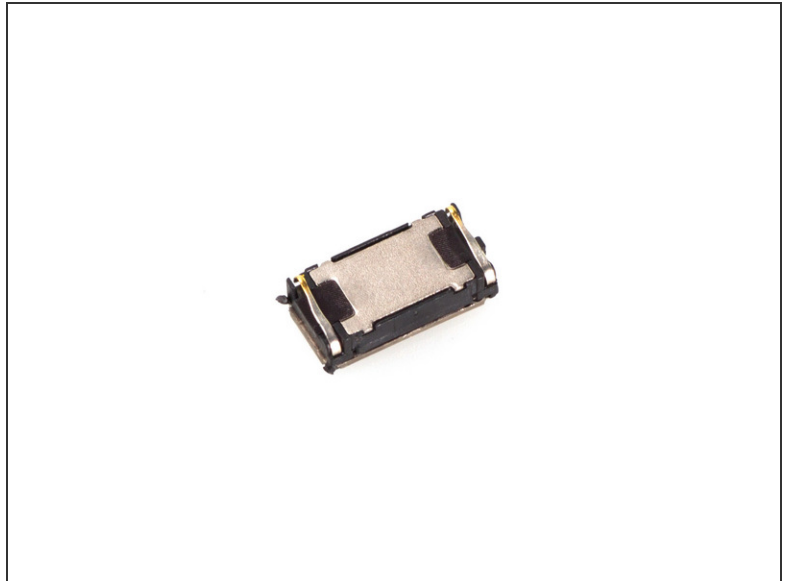

- Be careful to pry this part up, because it tends to fall apart easily.

Step 23 — Remove side button flex.



- Use tweezers to cut adhesives underneath.

Step 24



- Here is LCD screen with LCD supporting frame. They are attached tightly, so we haven't separate them.

Step 25



- Done.

This document was last generated on 2017-08-21 06:11:12 AM.